

Edge 55

MULTILINE
bright with light



INDEX

CUSTOM MADE SYSTEMS



SUSPENDED LUMINAIRES



WALL LUMINAIRES




SURFACE MOUNTED LUMINAIRES




RECESSED LUMINAIRES



CUSTOM MADE SYSTEM

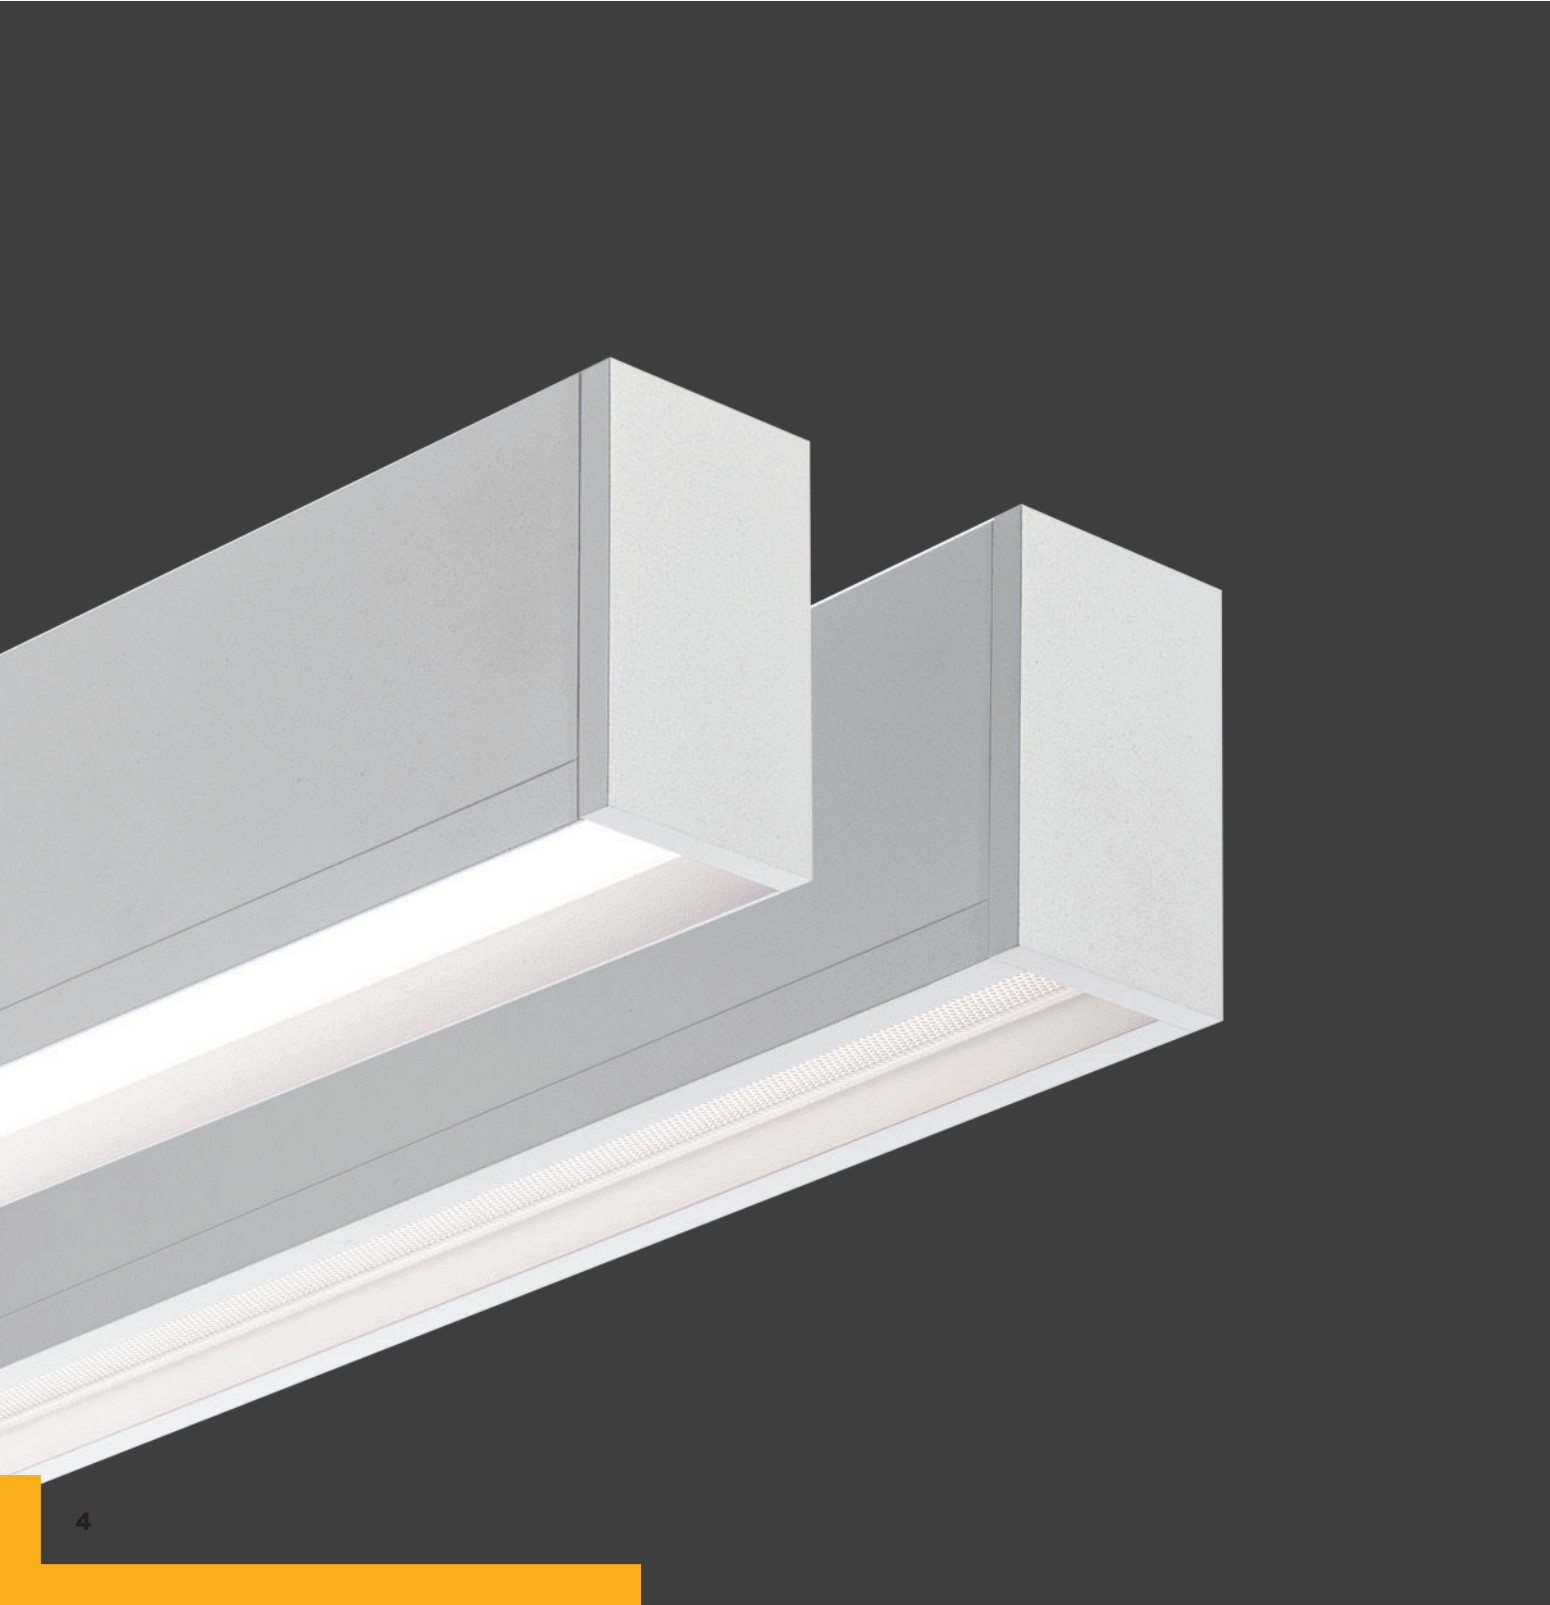


PROFILES & INFILL PANELS




code	type
09.74100-0001	profile ANO
09.74100-9999	profile RAL

when using only LED inserts, the correct length = (number of inserts * 280) + 16mm
 bij gebruik van enkel LED modules, is de correcte lengte = (aantal modules * 280) + 16mm
 en cas d'utilisation de que des modules de LED, la longueur correcte = (nombre de modules * 280) + 16mm
 wenn nur LED Einsätze verwendet werden, ist die richtige Länge = (Anzahl der Einsätze * 280) + 16mm




code	type
09.74102-0001	straight trim profile ANO
09.74102-9999	straight trim profile RAL

when using only LED inserts, the correct length = (number of inserts * 280) + 16mm
 bij gebruik van enkel LED modules, is de correcte lengte = (aantal modules * 280) + 16mm
 en cas d'utilisation de que des modules de LED, la longueur correcte = (nombre de modules * 280) + 16mm
 wenn nur LED Einsätze verwendet werden, ist die richtige Länge = (Anzahl der Einsätze * 280) + 16mm



code	type
09.74103-0001	bevelled trim profile ANO
09.74103-9999	bevelled trim profile RAL

when using only LED inserts, the correct length = (number of inserts * 280) + 16mm
 bij gebruik van enkel LED modules, is de correcte lengte = (aantal modules * 280) + 16mm
 en cas d'utilisation de que des modules de LED, la longueur correcte = (nombre de modules * 280) + 16mm
 wenn nur LED Einsätze verwendet werden, ist die richtige Länge = (Anzahl der Einsätze * 280) + 16mm




code	type
09.74101-0001	infill panel ANO
09.74101-9999	infill panel RAL

is necessary where there is no LED diffuser foreseen
 is nodig waar er geen LED afscherming is voorzien
 est nécessaire là où il n'y a pas de diffuseur LED
 ist notwendig wo keine LED Abdeckung vorgesehen ist





0001=anodised
 geanodiseerd
 anodisé
 eloxiert

9999=any RAL colour powder coated. Main profile, trim profiles and infill panel can be coated in a different colour!
 elke RAL kleur poederlak. Hoofdprofiel, randprofielen en afdekprofiel kunnen in een verschillende kleur worden gelakt!
 chaque teinte RAL peint-par-poudrage. Profil de base, profils de bord et couvercle plat peuvent être peints en couleurs différentes!
 jede RAL Farbe pulverbeschichtet. Hauptprofil, Randprofile und flaches Abdeckprofil können in unterschiedliche Farben beschichtet werden!

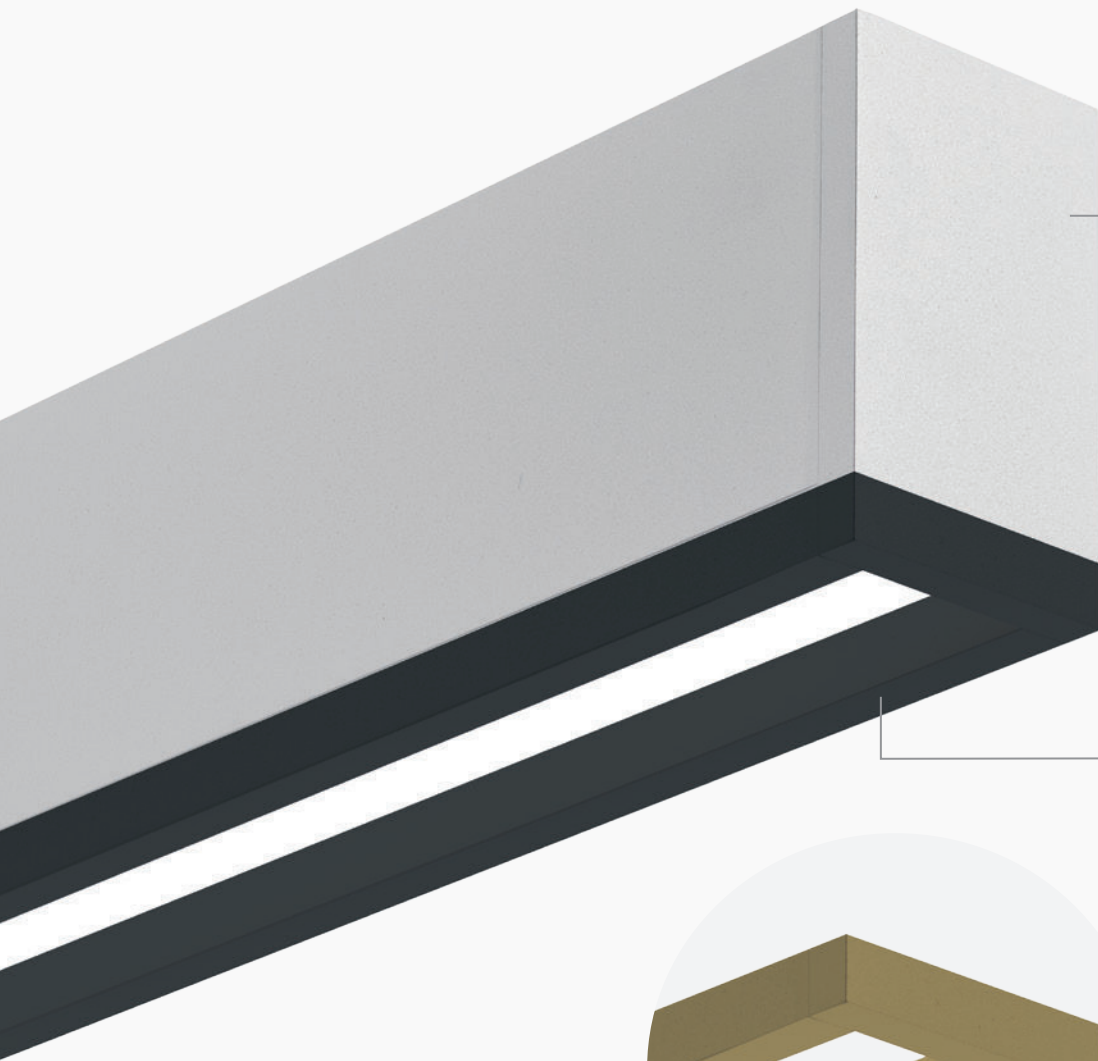


MAIN PROFILE

STRAIGHT
TRIM PROFILE

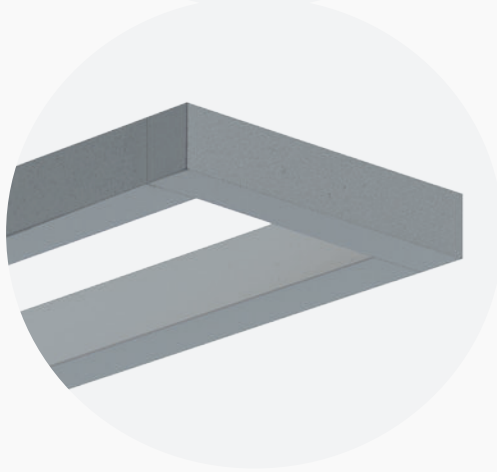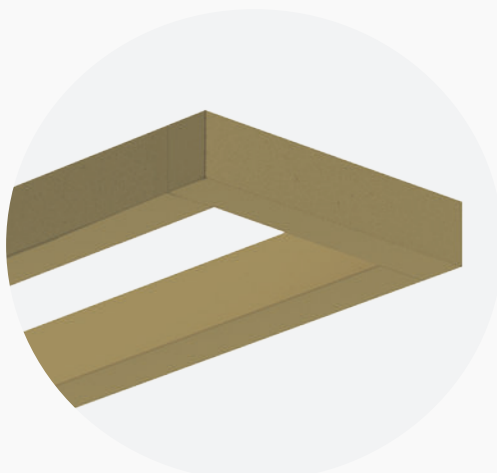


choose
any RAL colour
for the main
and trim profile

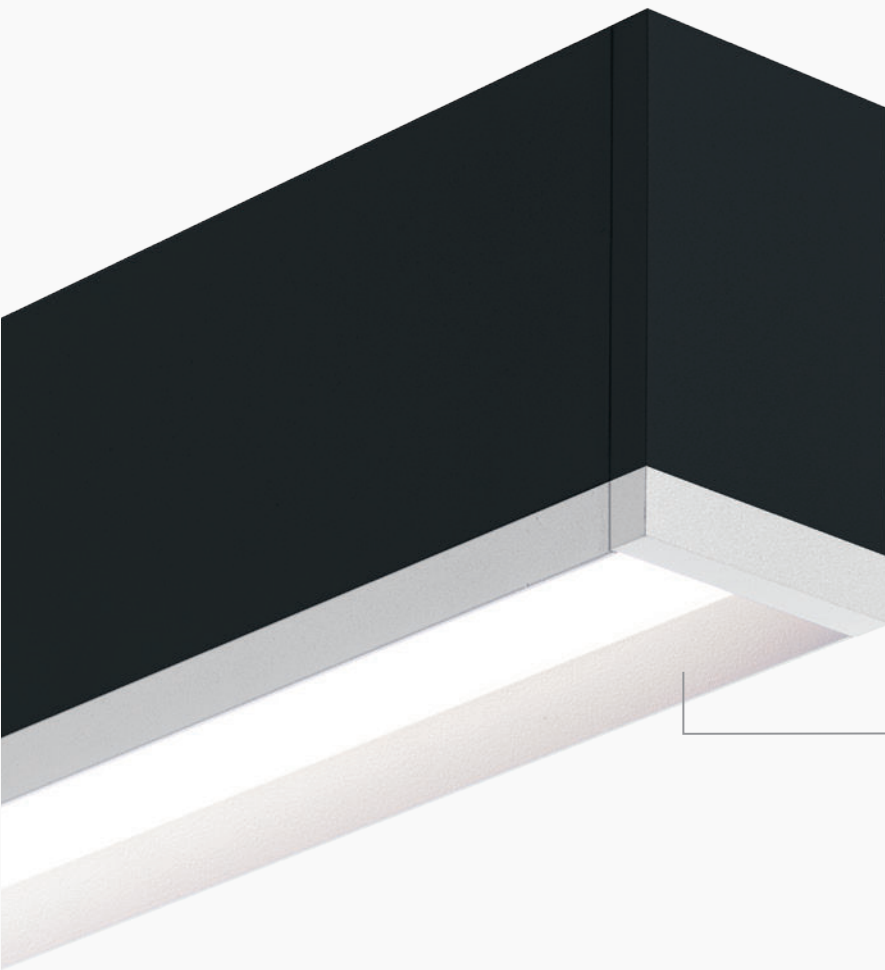


BEVELLED
TRIM PROFILE

END CAPS & CORNERS




code	type
01.74181-0001	end cap ANO
01.74181-9999	end cap RAL

required if main and trim profile have a different colour
vereist indien hoofd- en randprofiel een verschillende kleur hebben
nécessaire si le profil de base et de bord ont une couleur différente
erforderlich, wenn Haupt- und Randprofil eine unterschiedliche Farbe haben



code	type
01.74180-0001	end cap ANO
01.74180-9999	end cap RAL

required if main and trim profile have the same colour
vereist indien hoofd- en randprofiel dezelfde kleur hebben
nécessaire si le profil de base et de bord ont la même couleur
erforderlich, wenn Haupt- und Randprofil die gleiche Farbe haben




code	type
01.74160-0000	In-line coupler 180°




code	type
01.74150-0000	L-corner 90°
01.74100-0000	2way-corner 45-179°

mitre cut · in verstek gezaagd · coupé en biais · auf Gehrung geschnitten



code	type
01.74130-0000	T-corner 2x90°
01.74104-0000	3way-corner 1x180°+2x45-135°

mitre cut · in verstek gezaagd · coupé en biais · auf Gehrung geschnitten



code	type
01.74140-0000	X-corner 4x90°
01.74105-0000	4way-corner 4x45-135°


mitre cut · in verstek gezaagd · coupé en biais · auf Gehrung geschnitten




0001=anodised
geanodiseerd
anodisé
eloxiert

9999=any RAL colour powder coated
elke RAL kleur poederlak
chaque teinte RAL peint-par-poudrage
jede RAL Farbe pulverbeschichtet


TRIMLESS INSTALLATION




code type
09.00007-9010 trimless finishing profile




code type
03.74500-0012 supporting bracket 12,5mm
03.74500-0015 supporting bracket 15mm



code type
03.74501-0012 supporting bracket 12,5mm
03.74501-0015 supporting bracket 15mm




code type
01.74900-9010 end piece finishing profile




code type
01.00100-0000 2way-corner finishing profile 45-179°

mitre cut · in verstek gezaagd · coupé en biais · auf Gehrung geschnitten

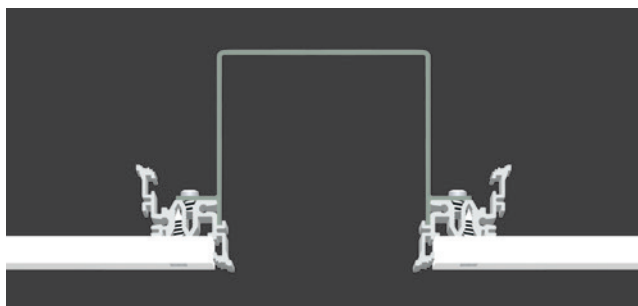

9010=white RAL9010
wit RAL9010
blanc RAL9010
weiß RAL9010

LED INSERTS




code	type
27.74607-4030	LED insert LO - L70mm - 0,25 insert
27.74600-4030	LED insert LO - L140mm - 0,5 insert
27.74610-4030	LED insert LO - L280mm - 1 insert
27.74620-4030	LED insert LO - L560mm - 2 inserts
27.74608-4030	LED insert HO - L70mm - 0,25 insert
27.74601-4030	LED insert HO - L140mm - 0,5 insert
27.74611-4030	LED insert HO - L280mm - 1 insert
27.74621-4030	LED insert HO - L560mm - 2 inserts

LO = low output, HO = high output

CRI
>80

CRI>90 on request
CRI>90 op aanvraag
CRI>90 sur demande
CRI>90 auf Anfrage




code	type
27.00607-4030	LED insert LO - L70mm - 0,25 insert
27.00600-4030	LED insert LO - L140mm - 0,5 insert
27.00610-4030	LED insert LO - L280mm - 1 insert
27.00620-4030	LED insert LO - L560mm - 2 inserts
27.00608-4030	LED insert HO - L70mm - 0,25 insert
27.00601-4030	LED insert HO - L140mm - 0,5 insert
27.00611-4030	LED insert HO - L280mm - 1 insert
27.00621-4030	LED insert HO - L560mm - 2 inserts

LO = low output, HO = high output

CRI
>80

CRI>90 on request
CRI>90 op aanvraag
CRI>90 sur demande
CRI>90 auf Anfrage



code	type	dim
27.000091w-0625	LED driver 25W	-
27.000091w-0650	LED driver 50W	-
27.000091w-0675	LED driver 75W	-
27.000091w-0825	LED driver 25W	DALI/TD
27.000091w-0850	LED driver 50W	DALI/TD
27.000091w-0875	LED driver 75W	DALI/TD

LO = low output, HO = high output, TD = touch-dim, 1-10V on request


for each type of driver, the code to be entered (W), the current (mA), the lumen value and the range are displayed. Choose the suitable driver based on the number of LED inserts (=range) and the lumen value - per type driver worden de in te vullen code (W), aansturing (mA), lumenwaarde en het bereik weergegeven. Kies de geschikte driver op basis van het aantal LED modules (=bereik) en de lumenwaarde - pour chaque type de driver, le code à choisir (W), le courant (mA), la valeur de lumen et la portée sont présentés. Choisissez le driver approprié en fonction du nombre de modules LED (=la portée) et la valeur de lumen - für jeden Treibertyp werden der einzugebende Code (W), die Ansteuerung (mA), der Lumenwert und der Bereich angezeigt. Wählen Sie den geeigneten Treiber gemäß der Anzahl LED Einsätze (=Bereich) und dem Lumenwert

	LO W=3 325mA 3,6W 670lm/280mm # inserts	HO W=1 150mA 3,2W 670lm/280mm # inserts	HO W=3 325mA 7,2W 1340lm/280mm # inserts
27 . 000091w - 0625	2 - 4,25	1 - 2	1 - 2
27 . 000091w - 0650	4,75 - 12	2,5 - 6,25	2,5 - 6
27 . 000091w - 0675	12,25 - 19	6,5 - 9,75	6,25 - 9,5
27 . 000091w - 0825	2 - 4,5	1 - 2,25	1 - 2,25
27 . 000091w - 0850	4,75 - 12	2,5 - 6,25	2,5 - 6
27 . 000091w - 0875	12,25 - 19	6,5 - 9,75	6,25 - 9,5



27= 2700K
30= 3000K
40= 4000K

for more information about the LED inserts, see pages 428-429
voor meer informatie over de LED modules zie pagina's 428-429
pour plus d'informations sur les modules LED, voir pages 428-429
für mehr Informationen zu den LED Einsätzen, siehe Seiten 428-429



code

type

27.74630-9030
27.74640-9030
27.74650-9030

LED TW 2700-6500K 20,5W 2100lm LO - L840mm
LED TW 2700-6500K 26,4W 2800lm LO - L1120mm
LED TW 2700-6500K 32,0W 3500lm LO - L1400mm


27.74631-9030
27.74641-9030
27.74651-9030

LED TW 2700-6500K 41,1W 4500lm HO - L840mm
LED TW 2700-6500K 54,1W 6000lm HO - L1120mm
LED TW 2700-6500K 67,3W 7500lm HO - L1400mm

CRI
>90

LO = low output, HO = high output, TW = tunable white

DALI driver type 8 included · Inclusief DALI driver type 8 · driver DALI type 8 inclus · inklusive DALI Treiber Typ 8
type 6 on request · type 6 op aanvraag · type 6 sur demande · Typ 6 auf Anfrage



code

type

27.00630-9030
27.00640-9030
27.00650-9030

LED TW 2700-6500K 20,5W 2100lm LO - L840mm
LED TW 2700-6500K 26,4W 2800lm LO - L1120mm
LED TW 2700-6500K 32,0W 3500lm LO - L1400mm

27.00631-9030
27.00641-9030
27.00651-9030

LED TW 2700-6500K 41,1W 4500lm HO - L840mm
LED TW 2700-6500K 54,1W 6000lm HO - L1120mm
LED TW 2700-6500K 67,3W 7500lm HO - L1400mm

CRI
>90

LO = low output, HO = high output, TW = tunable white

DALI driver type 8 included · Inclusief DALI driver type 8 · driver DALI type 8 inclus · inklusive DALI Treiber Typ 8
type 6 on request · type 6 op aanvraag · type 6 sur demande · Typ 6 auf Anfrage

LED DIFFUSERS




code


type

02.74800-0000

satin LED diffuser direct




straight



h=53% CIE 56 85 98 99 53

bevelled



h=59% CIE 56 87 99 99 59




code


type

02.74803-0000

microprismatic LED diffuser




straight




h=44% CIE 62 90 98 100 44

bevelled



h=48% CIE 62 92 99 100 48





code

type

02.74900-0000

satin LED diffuser indirect



h=73% CIE 0 0 0 0 73







EMERGENCY MODULES



code	type
27.00290-0000	LED emergency 1h 350lm - selftest
27.00291-0000	LED emergency 3h 350lm - selftest
27.00292-0000	LED emergency 1h 350lm - selftest DALI
27.00293-0000	LED emergency 3h 350lm - selftest DALI



only applicable from 4 LED inserts (1h - selftest) or 6 LED inserts (3h - selftest) · min. 280-max. 560mm per driver in case of emergency
enkel geschikt vanaf 4 LED modules (1h - selftest) of 6 LED modules (3h - selftest) · min. 280-max. 560mm per driver in noodtoestand
seulement utilisable à partir de 4 modules LED (1h - selftest) ou 6 modules LED (3h - selftest) · min. 280-max. 560mm par driver en configuration secours
nur geeignet ab 4 LED Einsätzen (1h - selftest) oder 6 LED Einsätzen (3h - selftest) · min. 280-max. 560mm pro Treiber im Notstand

ACCESSORIES




code	type
27.740132-9999	LED downlight 3x1W 2700K 357lm 8°
27.740232-9999	LED downlight 3x1W 2700K 357lm 32°
27.740133-9999	LED downlight 3x1W 3000K 378lm 8°
27.740233-9999	LED downlight 3x1W 3000K 378lm 32°
27.740134-9999	LED downlight 3x1W 4000K 399lm 8°
27.740234-9999	LED downlight 3x1W 4000K 399lm 32°

order drivers separately · voedingen apart bestellen · commandez l'alimentation séparément · Treiber separat bestellen



code	type
27.740142-9999	LED downlight 4x1W 2700K 476lm 8°
27.740242-9999	LED downlight 4x1W 2700K 476lm 32°
27.740143-9999	LED downlight 4x1W 3000K 504lm 8°
27.740243-9999	LED downlight 4x1W 3000K 504lm 32°
27.740144-9999	LED downlight 4x1W 4000K 532lm 8°
27.740244-9999	LED downlight 4x1W 4000K 532lm 32°

order drivers separately · voedingen apart bestellen · commandez l'alimentation séparément · Treiber separat bestellen




code	type	dim	3x1W-350mA # downlights	4x1W-350mA # downlights
27.0000917-0608	LED driver 8W	-	1-2	1
27.0000917-0625	LED driver 25W	-	3-5	2-4
27.0000917-0650	LED driver 50W	-	6-14	5-10
27.0000917-0810	LED driver 10W	DALI	1-3	1-2
27.0000917-0825	LED driver 25W	DALI/TD	3-5	2-4
27.0000917-0850	LED driver 50W	DALI/TD	6-14	5-10

TD = touch-dim




9999=any RAL colour powder coated
elke RAL kleur poederlak
chaque teinte RAL peint-par-poudrage
jede RAL Farbe pulverbeschichtet



code	type
27.000152-9999	spot 5W 2700K 482lm 10°
27.000252-9999	spot 5W 2700K 482lm 25°
27.000352-9999	spot 5W 2700K 482lm 40°
27.000153-9999	spot 5W 3000K 500lm 10°
27.000253-9999	spot 5W 3000K 500lm 25°
27.000353-9999	spot 5W 3000K 500lm 40°
27.000154-9999	spot 5W 4000K 532lm 10°
27.000254-9999	spot 5W 4000K 532lm 25°
27.000354-9999	spot 5W 4000K 532lm 40°



**CRI
>90**

order drivers separately · voedingen apart bestellen · commandez l'alimentation séparément · Treiber separat bestellen




code	type	dim	5W-200mA # spots
27.0000916-0625	LED driver 25W	-	1-2
27.0000916-0650	LED driver 50W	-	3-5
27.0000916-0825	LED driver 25W	DALI/TD	1-2
27.0000916-0850	LED driver 50W	DALI/TD	3-5

TD = touch-dim



code	type
27.00040-9005	push switch ON/OFF 250V/10Amp
27.00041-9005	push switch ON/OFF+dimming 250V/10Amp

27.00041-9005 only with DALI/TD dimmable insert, max. 4 drivers per push switch
 27.00041-9005 enkel met DALI/TD dimbare module, max. 4 drivers per drukknop
 27.00041-9005 seulement avec module dimmable DALI/TD, 4 drivers par bouton poussoir au maximum
 27.00041-9005 nur mit DALI/TD dimmbarem Einsatz, Maximal 4 Treiber pro Druckknopf



code	type
27.00105-0000	motion detector max. 2 drivers



stand-alone system that cannot be connected in parallel

code	type
27.00106-0000	white daylight and/or motion detector – max. 2x 5 drivers
27.00106-9005	black daylight and/or motion detector – max. 2x 5 drivers

only with DALI dimmable insert · enkel met DALI dimbare module · seulement avec module dimmable DALI · nur mit DALI dimmbarem Einsatz

including remote control for on/off + dimming
 inclusief afstandsbediening voor aan/uit + dimmen
 commande inclus pour allumer/éteindre + régler l'intensité de la lumière
 Fernbedienung einbegriffen um ein-/aus zu schalten + zu dimmen

stand-alone system that cannot be connected in parallel



9999=any RAL colour powder coated
 elke RAL kleur poederlak
 chaque teinte RAL peint-par-poudrage
 jede RAL Farbe pulverbeschichtet




code type

22.99122-0000 remote control

to order together with the daylight & motion detector (27.00106-0000)


remote control suitable for extensive configuration of sensor (only motion, only daylight or both,...)
afstandsbediening geschikt voor uitgebreide instelling van sensor (enkel beweging, enkel daglicht of beide,...)
commande appropriée pour le réglage du détecteur (seulement du mouvement, seulement de la lumière du jour ou tous les deux,...)
Fernbedienung geeignet für ausführliche Einstellung des Sensors (nur Bewegung, nur Tageslicht oder beide,...)

FIXATIONS



code type


03.74204-0000 bracket for perpendicular wall fixation



code type

03.74176-9999 parallel wall base – L100


03.74177-9999 parallel wall base with cable entry – L150



code type


03.74207-0000 key hole

only possible with a minimum profile length of 1000mm · enkel mogelijk met minimum profiellengte van 1000mm · seulement possible avec une longueur de profil d'au moins 1000mm · nur mit einer Profillänge von mindestens 1000mm möglich



code type

03.74208-0000 entry hole for power cable

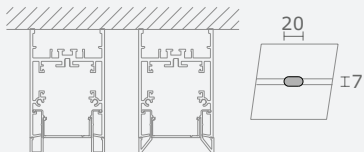


code type

03.74206-0000 slot for direct mounting




9999=any RAL colour powder coated
elke RAL kleur poederlak
chaque teinte RAL peint-par-poudrage
jede RAL Farbe pulverbeschichtet

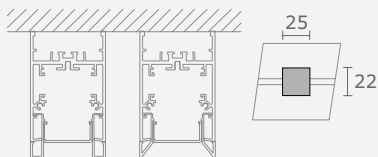

code type
03.74205-0000 entry hole for power cable


center of power supply hole at minimum 35mm from the end
 center van voedingsgat op minimum 35mm van het uiteinde
 centre du trou d'alimentation à au moins 35mm de l'extrémité
 Mitte der Öffnung für die Einspeisung mindestens 35mm vom Ende entfernt

SUSPENSIONS & CABLES




code type
03.99100-2400 steelwire suspension type 1 - L1800mm
03.99100-4700 steelwire suspension type 1 - L4500mm

steelwire is adjustable on the ceiling
 staaldraad is verstelbaar aan het plafond
 le fil d'acier est réglable au plafond
 Stahldraht ist an der Decke verstellbar




code type
03.99113-2400 black steelwire suspension type 1 - L1800mm
03.99113-4700 black steelwire suspension type 1 - L4500mm

steelwire is adjustable on the ceiling
 staaldraad is verstelbaar aan het plafond
 le fil d'acier est réglable au plafond
 Stahldraht ist an der Decke verstellbar





code type
03.99110-2400 steelwire suspension type 2 - L1800mm
03.99110-4700 steelwire suspension type 2 - L4500mm

steelwire is adjustable on the profile
 staaldraad is verstelbaar aan het profiel
 le fil d'acier est réglable au profil
 Stahldraht ist am Profil verstellbar




code type
03.99183-0000 steelwire suspension pivotable - L1800mm
03.99185-0000 steelwire suspension pivotable - L4500mm




code type
03.99506-9999 power cable 3x0,75mm² - L1800mm
03.99518-9999 power cable 3x1,5mm² - L1800mm
03.99538-9999 power cable 5x0,75mm² - L1800mm
03.99528-9999 power cable 5x1,5mm² - L1800mm
03.99507-9999 power cable 3x0,75mm² - L4500mm
03.99519-9999 power cable 3x1,5mm² - L4500mm
03.99539-9999 power cable 5x0,75mm² - L4500mm
03.99529-9999 power cable 5x1,5mm² - L4500mm



9999=any RAL colour powder coated
 elke RAL kleur poederlak
 chaque teinte RAL peint-par-poudrage
 jede RAL Farbe pulverbeschichtet



code	type
03.99210-9999	rod suspension – L600mm
03.99230-9999	rod suspension – L1000mm




code	type
03.99206-9999	rod suspension incl. 3x1,5mm ² – L600mm
03.99226-9999	rod suspension incl. 3x1,5mm ² – L1000mm

ADDITIONAL WIRING



standard wiring	1 switching circuit with 3 cables 1,5mm ² : L = phase (brown), N = neutral (blue), earthing (yellow-green)
standaard bedrading	1 schakelkring met 3 kabels 1,5mm ² : L = fase (bruin), N = nulleiter (blauw), aarding (geel-groen)
câblage standard	1 circuit avec 3 câbles 1,5mm ² : L = phase (brun), N = neutre (bleu), terre (jaune-vert)
standard Verdrahtung	1 Schaltkreis mit 3 Kabeln 1,5mm ² : L = Phase (braun), N = Nulleiter (blau), Erdung (gelb-grün)



code	type
23.00099-1150	1 cable 1,5mm ² for additional switching circuit (grey or orange or violet)
23.00099-2075	2 cables 0,75mm ² for dimming (black & red)
23.00099-2150	2 cables 1,5mm ² for emergency module supply (white & blue)



9999=any RAL colour powder coated
elke RAL kleur poederlak
chaque teinte RAL peint-par-poudrage
jede RAL Farbe pulverbeschichtet



SUSPENDED LUMINAIRE




EDGE 55 WITH STRAIGHT TRIM

direct lighting



230V
50Hz IP20 A CE PS



satin



MPO



LOW lumen output

code	A	watt excl. driver	gross lumen	dim
04.740t054y-zzzz	1136	12,8	2680	-
04.740t055y-zzzz	1416	16,0	3350	-
04.740t056y-zzzz	1696	19,2	4020	-
04.740t057y-zzzz	1976	22,4	4690	-
04.740t058y-zzzz	2256	25,6	5360	-
04.740t059y-zzzz	2536	28,8	6030	-
04.740t050y-zzzz	2816	32,0	6700	-
04.740t454y-zzzz	1136	12,8	2680	dim
04.740t455y-zzzz	1416	16,0	3350	dim
04.740t456y-zzzz	1696	19,2	4020	dim
04.740t457y-zzzz	1976	22,4	4690	dim
04.740t458y-zzzz	2256	25,6	5360	dim
04.740t459y-zzzz	2536	28,8	6030	dim
04.740t450y-zzzz	2816	32,0	6700	dim

HIGH lumen output

code	A	watt excl. driver	gross lumen	dim
04.740t064y-zzzz	1136	28,8	5360	-
04.740t065y-zzzz	1416	36,0	6700	-
04.740t066y-zzzz	1696	43,2	8040	-
04.740t067y-zzzz	1976	50,4	9380	-
04.740t068y-zzzz	2256	57,6	10720	-
04.740t069y-zzzz	2536	64,8	12060	-
04.740t060y-zzzz	2816	72,0	13400	-
04.740t464y-zzzz	1136	28,8	5360	dim
04.740t465y-zzzz	1416	36,0	6700	dim
04.740t466y-zzzz	1696	43,2	8040	dim
04.740t467y-zzzz	1976	50,4	9380	dim
04.740t468y-zzzz	2256	57,6	10720	dim
04.740t469y-zzzz	2536	64,8	12060	dim
04.740t460y-zzzz	2816	72,0	13400	dim

t= diffusers

0= satin diffuser
1= microprismatic diffuser

y= colour temperature

3= 3000K
4= 4000K
2700K on request

zzzz= colour

0001= anodised
9999= any RAL colour

info

dimable version DALI/TD
1-10V and emergency on
request


EDGE 55 WITH STRAIGHT TRIM

direct-indirect lighting



230V 50Hz IP20 A CE PS




satin



MPO



indirect



LOW lumen output

code	A	watt excl. driver	gross lumen	dim
04.741t054y-zzzz	1136	22,4	4690	-
04.741t055y-zzzz	1416	28,8	6030	-
04.741t056y-zzzz	1696	35,2	7370	-
04.741t057y-zzzz	1976	41,6	8710	-
04.741t058y-zzzz	2256	48,0	10050	-
04.741t059y-zzzz	2536	54,4	11390	-
04.741t050y-zzzz	2816	57,6	12060	-
04.741t454y-zzzz	1136	22,4	4690	dim
04.741t455y-zzzz	1416	28,8	6030	dim
04.741t456y-zzzz	1696	35,2	7370	dim
04.741t457y-zzzz	1976	41,6	8710	dim
04.741t458y-zzzz	2256	48,0	10050	dim
04.741t459y-zzzz	2536	54,4	11390	dim
04.741t450y-zzzz	2816	57,6	12060	dim

HIGH lumen output

code	A	watt excl. driver	gross lumen	dim
04.741t064y-zzzz	1136	50,4	9380	-
04.741t065y-zzzz	1416	64,8	12060	-
04.741t066y-zzzz	1696	79,2	14740	-
04.741t067y-zzzz	1976	93,6	17420	-
04.741t068y-zzzz	2256	108,0	20100	-
04.741t069y-zzzz	2536	122,4	22780	-
04.741t060y-zzzz	2816	129,6	24120	-
04.741t464y-zzzz	1136	50,4	9380	dim
04.741t465y-zzzz	1416	64,8	12060	dim
04.741t466y-zzzz	1696	79,2	14740	dim
04.741t467y-zzzz	1976	93,6	17420	dim
04.741t468y-zzzz	2256	108,0	20100	dim
04.741t469y-zzzz	2536	122,4	22780	dim
04.741t460y-zzzz	2816	129,6	24120	dim

t= diffusers

0= satin diffuser
1= microprismatic diffuser

y= colour temperature

3= 3000K
4= 4000K
2700K on request

zzzz= colour

0001= anodised
9999= any RAL colour

info

 dimmable version DALI/TD
1-10V and emergency on
request


EDGE 55 WITH BEVELLED TRIM

direct lighting



230V
50Hz IP20 A CE PS



satin



MPO



LOW lumen output

code	A	watt excl. driver	gross lumen	dim
04.742t054y-zzzz	1136	12,8	2680	-
04.742t055y-zzzz	1416	16,0	3350	-
04.742t056y-zzzz	1696	19,2	4020	-
04.742t057y-zzzz	1976	22,4	4690	-
04.742t058y-zzzz	2256	25,6	5360	-
04.742t059y-zzzz	2536	28,8	6030	-
04.742t050y-zzzz	2816	32,0	6700	-
04.742t454y-zzzz	1136	12,8	2680	dim
04.742t455y-zzzz	1416	16,0	3350	dim
04.742t456y-zzzz	1696	19,2	4020	dim
04.742t457y-zzzz	1976	22,4	4690	dim
04.742t458y-zzzz	2256	25,6	5360	dim
04.742t459y-zzzz	2536	28,8	6030	dim
04.742t450y-zzzz	2816	32,0	6700	dim

HIGH lumen output

code	A	watt excl. driver	gross lumen	dim
04.742t064y-zzzz	1136	28,8	5360	-
04.742t065y-zzzz	1416	36,0	6700	-
04.742t066y-zzzz	1696	43,2	8040	-
04.742t067y-zzzz	1976	50,4	9380	-
04.742t068y-zzzz	2256	57,6	10720	-
04.742t069y-zzzz	2536	64,8	12060	-
04.742t060y-zzzz	2816	72,0	13400	-
04.742t464y-zzzz	1136	28,8	5360	dim
04.742t465y-zzzz	1416	36,0	6700	dim
04.742t466y-zzzz	1696	43,2	8040	dim
04.742t467y-zzzz	1976	50,4	9380	dim
04.742t468y-zzzz	2256	57,6	10720	dim
04.742t469y-zzzz	2536	64,8	12060	dim
04.742t460y-zzzz	2816	72,0	13400	dim

t= diffusers

0= satin diffuser
1= microprismatic diffuser

y= colour temperature

3= 3000K
4= 4000K
2700K on request

zzzz= colour

0001= anodised
9999= any RAL colour

info

dimmable version DALI/TD
1-10V and emergency on
request


EDGE 55 WITH BEVELLED TRIM

direct-indirect lighting



230V 50Hz IP20 A CE PS




satin



MPO



indirect



LOW lumen output

code	A	watt excl. driver	gross lumen	dim
04.743t054y-zzzz	1136	22,4	4690	-
04.743t055y-zzzz	1416	28,8	6030	-
04.743t056y-zzzz	1696	35,2	7370	-
04.743t057y-zzzz	1976	41,6	8710	-
04.743t058y-zzzz	2256	48,0	10050	-
04.743t059y-zzzz	2536	54,4	11390	-
04.743t050y-zzzz	2816	57,6	12060	-
04.743t454y-zzzz	1136	22,4	4690	dim
04.743t455y-zzzz	1416	28,8	6030	dim
04.743t456y-zzzz	1696	35,2	7370	dim
04.743t457y-zzzz	1976	41,6	8710	dim
04.743t458y-zzzz	2256	48,0	10050	dim
04.743t459y-zzzz	2536	54,4	11390	dim
04.743t450y-zzzz	2816	57,6	12060	dim

HIGH lumen output

code	A	watt excl. driver	gross lumen	dim
04.743t064y-zzzz	1136	50,4	9380	-
04.743t065y-zzzz	1416	64,8	12060	-
04.743t066y-zzzz	1696	79,2	14740	-
04.743t067y-zzzz	1976	93,6	17420	-
04.743t068y-zzzz	2256	108,0	20100	-
04.743t069y-zzzz	2536	122,4	22780	-
04.743t060y-zzzz	2816	129,6	24120	-
04.743t464y-zzzz	1136	50,4	9380	dim
04.743t465y-zzzz	1416	64,8	12060	dim
04.743t466y-zzzz	1696	79,2	14740	dim
04.743t467y-zzzz	1976	93,6	17420	dim
04.743t468y-zzzz	2256	108,0	20100	dim
04.743t469y-zzzz	2536	122,4	22780	dim
04.743t460y-zzzz	2894	129,6	24120	dim

t= diffusers

0= satin diffuser
1= microprismatic diffuser

y= colour temperature

3= 3000K
4= 4000K
2700K on request

zzzz= colour


0001= anodised
9999= any RAL colour

info

 dimmable version DALI/TD
1-10V and emergency on
request



WALL LUMINAIRE

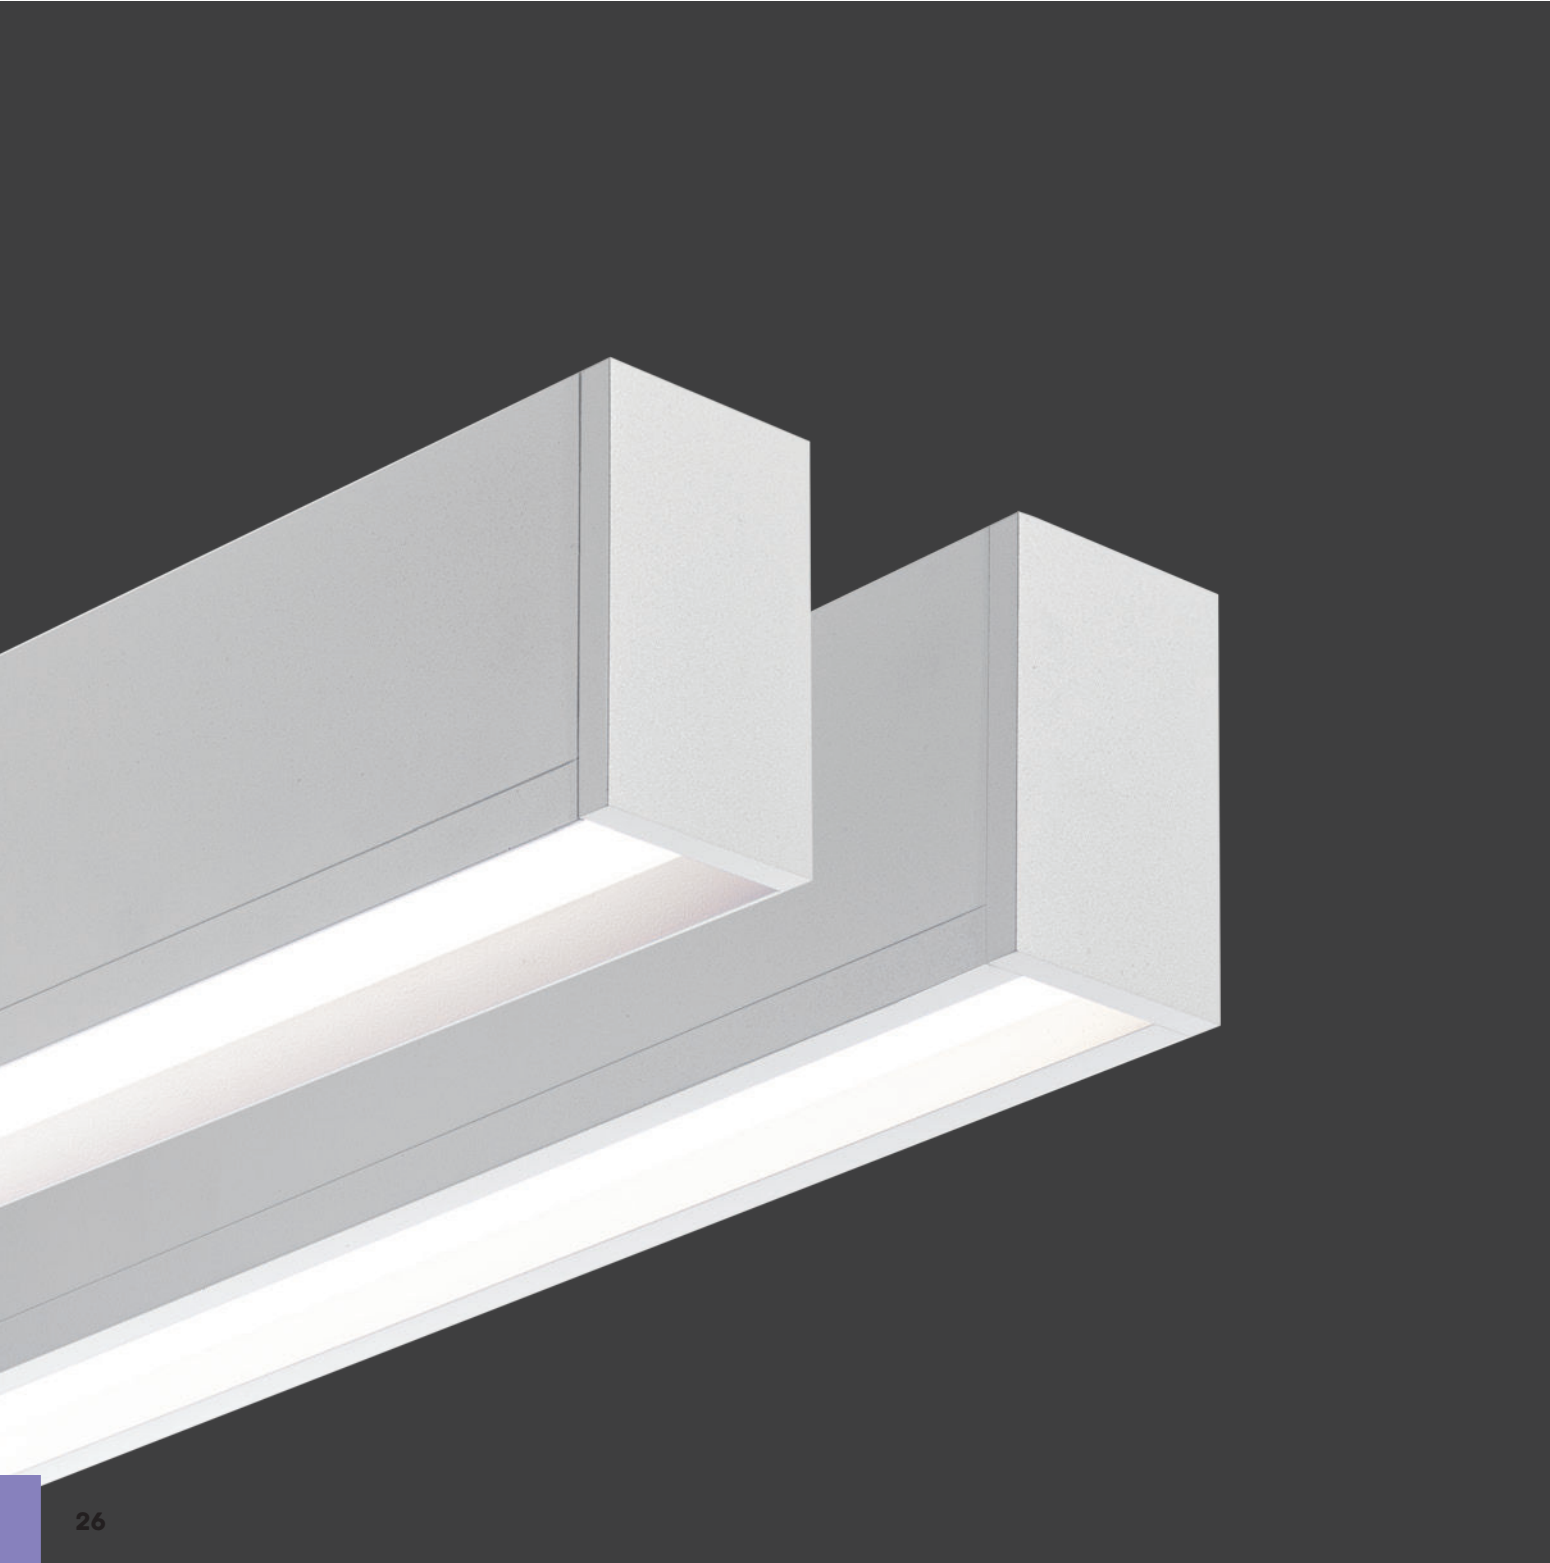

EDGE 55 WITH STRAIGHT TRIM

direct lighting












satin



LOW lumen output

code	A	watt excl. driver	gross lumen	dim
06.740t052y-zzzz	576	6,4	1340	-
06.740t053y-zzzz	856	9,6	2010	-
06.740t054y-zzzz	1136	12,8	2680	-
06.740t055y-zzzz	1416	16,0	3350	-
06.740t452y-zzzz	576	6,4	1340	dim
06.740t453y-zzzz	856	9,6	2010	dim
06.740t454y-zzzz	1136	12,8	2680	dim
06.740t455y-zzzz	1416	16,0	3350	dim

HIGH lumen output

code	A	watt excl. driver	gross lumen	dim
06.740t062y-zzzz	576	14,4	2680	-
06.740t063y-zzzz	856	21,6	4020	-
06.740t064y-zzzz	1136	28,8	5360	-
06.740t065y-zzzz	1416	36,0	6700	-
06.740t462y-zzzz	576	14,4	2680	dim
06.740t463y-zzzz	856	21,6	4020	dim
06.740t464y-zzzz	1136	28,8	5360	dim
06.740t465y-zzzz	1416	36,0	6700	dim

t= diffusers

0= satin diffuser

y= colour temperature

3= 3000K
4= 4000K
2700K on request

zzzz= colour

0001= anodised
9999= any RAL colour

info





dimmable version DALI/TD
1-10V and emergency on
request

EDGE 55 WITH STRAIGHT TRIM
direct-indirect lighting


 230V
50Hz
 
 IP20
 
 A
 




satin



LOW lumen output

code	A	watt excl. driver	gross lumen	dim
06.741t052y-zzzz	576	12,8	2680	-
06.741t053y-zzzz	856	19,2	4020	-
06.741t054y-zzzz	1136	25,6	5360	-
06.741t055y-zzzz	1416	32,0	6700	-
06.741t452y-zzzz	576	12,8	2680	dim
06.741t453y-zzzz	856	19,2	4020	dim
06.741t454y-zzzz	1136	25,6	5360	dim
06.741t455y-zzzz	1416	32,0	6700	dim

HIGH lumen output

code	A	watt excl. driver	gross lumen	dim
06.741t062y-zzzz	576	28,8	5360	-
06.741t063y-zzzz	856	43,2	8040	-
06.741t064y-zzzz	1136	57,6	10720	-
06.741t065y-zzzz	1416	72,0	13400	-
06.741t462y-zzzz	576	28,8	5360	dim
06.741t463y-zzzz	856	43,2	8040	dim
06.741t464y-zzzz	1136	57,6	10720	dim
06.741t465y-zzzz	1416	72,0	13400	dim

t= diffusers

0= satin diffuser

y= colour temperature

3= 3000K
 4= 4000K
 2700K on request

zzzz= colour

0001= anodised
 9999= any RAL colour

info




 dimmable version DALI/TD
 1-10V and emergency on
 request

EDGE 55 WITH BEVELLED TRIM
direct lighting

230V 50Hz IP20 A CE PS



satin



LOW lumen output

code	A	watt excl. driver	gross lumen	dim
06.742t052y-zzzz	576	6,4	1340	-
06.742t053y-zzzz	856	9,6	2010	-
06.742t054y-zzzz	1136	12,8	2680	-
06.742t055y-zzzz	1416	16,0	3350	-
06.742t452y-zzzz	576	6,4	1340	dim
06.742t453y-zzzz	856	9,6	2010	dim
06.742t454y-zzzz	1136	12,8	2680	dim
06.742t455y-zzzz	1416	16,0	3350	dim

HIGH lumen output

code	A	watt excl. driver	gross lumen	dim
06.742t062y-zzzz	576	14,4	2680	-
06.742t063y-zzzz	856	21,6	4020	-
06.742t064y-zzzz	1136	28,8	5360	-
06.742t065y-zzzz	1416	36,0	6700	-
06.742t462y-zzzz	576	14,4	2680	dim
06.742t463y-zzzz	856	21,6	4020	dim
06.742t464y-zzzz	1136	28,8	5360	dim
06.742t465y-zzzz	1416	36,0	6700	dim

t= diffusers

0= satin diffuser

y= colour temperature

3= 3000K
4= 4000K
2700K on request

zzzz= colour


0001= anodised
9999= any RAL colour

info


dimmmable version DALI/TD
1-10V and emergency on
request

EDGE 55 WITH BEVELLED TRIM direct-indirect lighting

 230V
50Hz
  IP20
  A
  CE
  PS



satin



LOW lumen output

code	A	watt excl. driver	gross lumen	dim
06.743t052y-zzzz	576	12,8	2680	-
06.743t053y-zzzz	856	19,2	4020	-
06.743t054y-zzzz	1136	25,6	5360	-
06.743t055y-zzzz	1416	32,0	6700	-
06.743t452y-zzzz	576	12,8	2680	dim
06.743t453y-zzzz	856	19,2	4020	dim
06.743t454y-zzzz	1136	25,6	5360	dim
06.743t455y-zzzz	1416	32,0	6700	dim

HIGH lumen output

code	A	watt excl. driver	gross lumen	dim
06.743t062y-zzzz	576	28,8	5360	-
06.743t063y-zzzz	856	43,2	8040	-
06.743t064y-zzzz	1136	57,6	10720	-
06.743t065y-zzzz	1416	72,0	13400	-
06.743t462y-zzzz	576	28,8	5360	dim
06.743t463y-zzzz	856	43,2	8040	dim
06.743t464y-zzzz	1136	57,6	10720	dim
06.743t465y-zzzz	1416	72,0	13400	dim

t= diffusers

0= satin diffuser

y= colour temperature

3= 3000K
 4= 4000K
 2700K on request


zzzz= colour

0001= anodised
 9999= any RAL colour


info



dimmable version DALI/TD
 1-10V and emergency on
 request

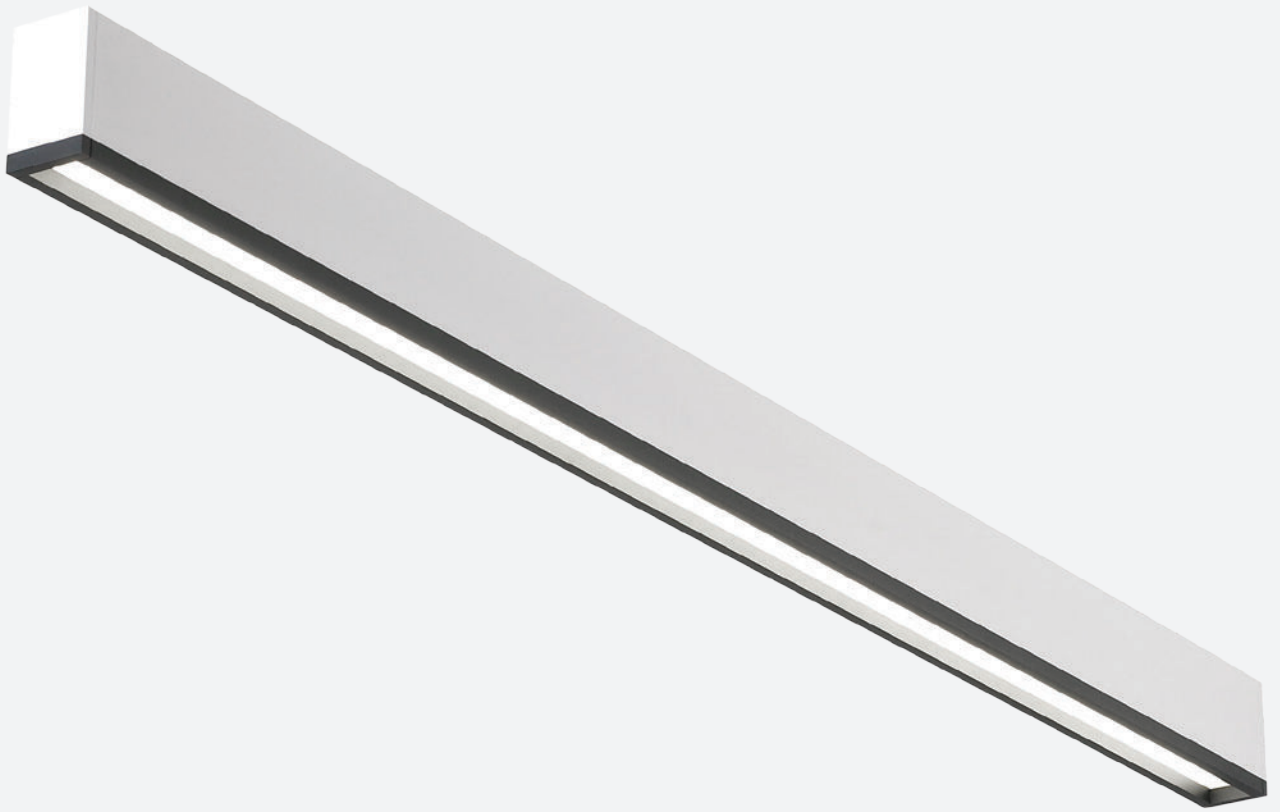

SURFACE MOUNTED LUMINAIRE

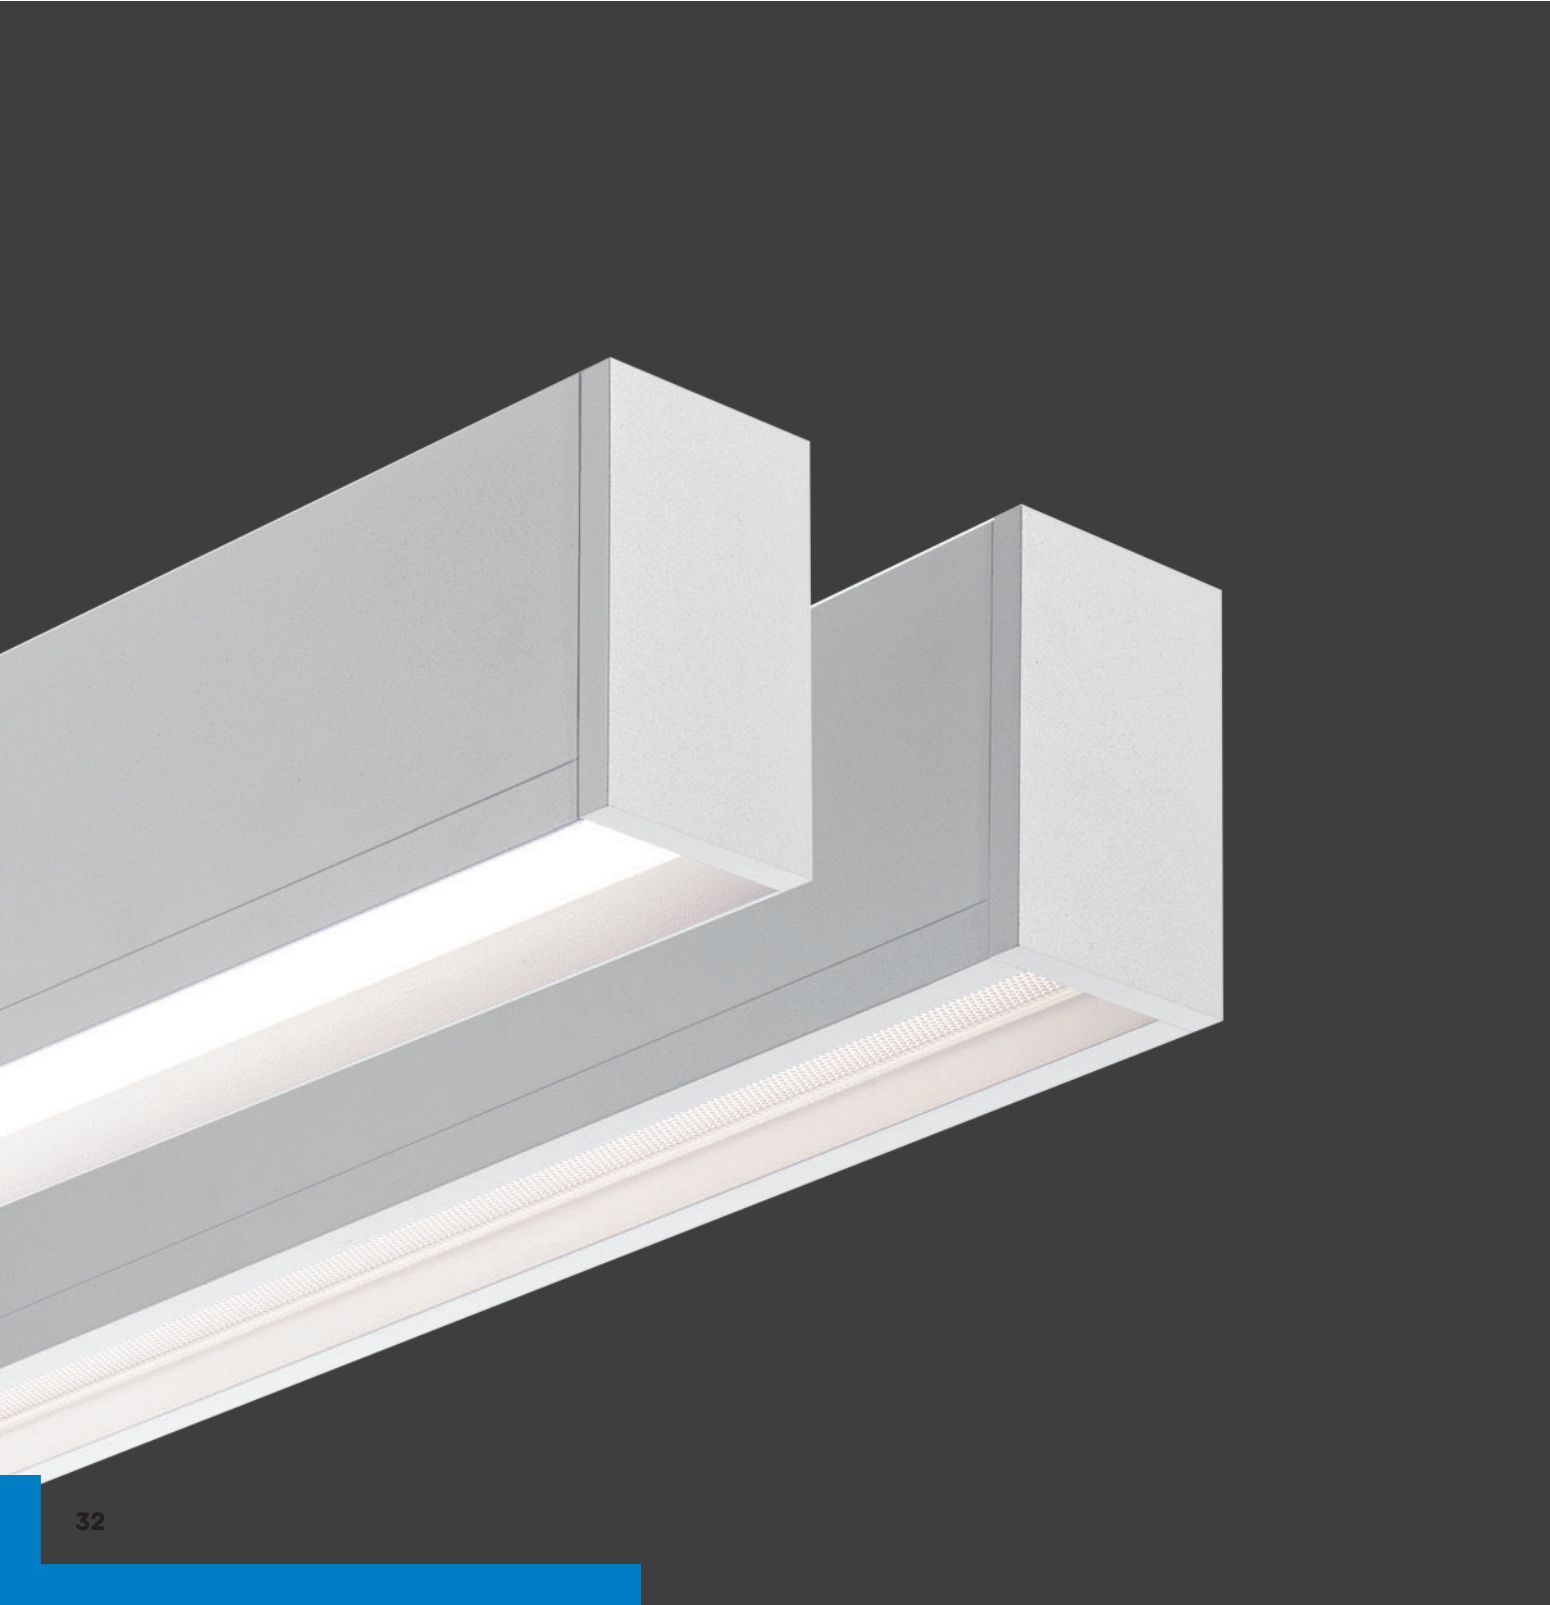


EDGE 55 WITH STRAIGHT TRIM

direct lighting



230V 50Hz IP20 A CE PS



satin



MPO



LOW lumen output

code	A	watt excl. driver	gross lumen	dim
05.740t054y-zzzz	1136	12,8	2680	-
05.740t055y-zzzz	1416	16,0	3350	-
05.740t056y-zzzz	1696	19,2	4020	-
05.740t057y-zzzz	1976	22,4	4690	-
05.740t058y-zzzz	2256	25,6	5360	-
05.740t059y-zzzz	2536	28,8	6030	-
05.740t050y-zzzz	2816	32,0	6700	-
05.740t454y-zzzz	1136	12,8	2680	dim
05.740t455y-zzzz	1416	16,0	3350	dim
05.740t456y-zzzz	1696	19,2	4020	dim
05.740t457y-zzzz	1976	22,4	4690	dim
05.740t458y-zzzz	2256	25,6	5360	dim
05.740t459y-zzzz	2536	28,8	6030	dim
05.740t450y-zzzz	2816	32,0	6700	dim

HIGH lumen output

code	A	watt excl. driver	gross lumen	dim
05.740t064y-zzzz	1136	28,8	5360	-
05.740t065y-zzzz	1416	36,0	6700	-
05.740t066y-zzzz	1696	43,2	8040	-
05.740t067y-zzzz	1976	50,4	9380	-
05.740t068y-zzzz	2256	57,6	10720	-
05.740t069y-zzzz	2536	64,8	12060	-
05.740t060y-zzzz	2816	72,0	13400	-
05.740t464y-zzzz	1136	28,8	5360	dim
05.740t465y-zzzz	1416	36,0	6700	dim
05.740t466y-zzzz	1696	43,2	8040	dim
05.740t467y-zzzz	1976	50,4	9380	dim
05.740t468y-zzzz	2256	57,6	10720	dim
05.740t469y-zzzz	2536	64,8	12060	dim
05.740t460y-zzzz	2816	72,0	13400	dim

t= diffusers

0= satin diffuser
1= microprismatic diffuser

y= colour temperature

3= 3000K
4= 4000K
2700K on request

zzzz= colour

0001= anodised
9999= any RAL colour

info

i dimmable version DALI/TD
1-10V and emergency on
request


EDGE 55 WITH BEVELLED TRIM

direct lighting



230V 50Hz IP20   



satin



MPO



LOW lumen output

code	A	watt excl. driver	gross lumen	dim
05.742t054y-zzzz	1136	12,8	2680	-
05.742t055y-zzzz	1416	16,0	3350	-
05.742t056y-zzzz	1696	19,2	4020	-
05.742t057y-zzzz	1976	22,4	4690	-
05.742t058y-zzzz	2256	25,6	5360	-
05.742t059y-zzzz	2536	28,8	6030	-
05.742t050y-zzzz	2816	32,0	6700	-
05.742t454y-zzzz	1136	12,8	2680	dim
05.742t455y-zzzz	1416	16,0	3350	dim
05.742t456y-zzzz	1696	19,2	4020	dim
05.742t457y-zzzz	1976	22,4	4690	dim
05.742t458y-zzzz	2256	25,6	5360	dim
05.742t459y-zzzz	2536	28,8	6030	dim
05.742t450y-zzzz	2816	32,0	6700	dim

HIGH lumen output

code	A	watt excl. driver	gross lumen	dim
05.742t064y-zzzz	1136	28,8	5360	-
05.742t065y-zzzz	1416	36,0	6700	-
05.742t066y-zzzz	1696	43,2	8040	-
05.742t067y-zzzz	1976	50,4	9380	-
05.742t068y-zzzz	2256	57,6	10720	-
05.742t069y-zzzz	2536	64,8	12060	-
05.742t060y-zzzz	2816	72,0	13400	-
05.742t464y-zzzz	1136	28,8	5360	dim
05.742t465y-zzzz	1416	36,0	6700	dim
05.742t466y-zzzz	1696	43,2	8040	dim
05.742t467y-zzzz	1976	50,4	9380	dim
05.742t468y-zzzz	2256	57,6	10720	dim
05.742t469y-zzzz	2536	64,8	12060	dim
05.742t460y-zzzz	2816	72,0	13400	dim

t= diffusers

0= satin diffuser
1= microprismatic diffuser

y= colour temperature

3= 3000K
4= 4000K
2700K on request

zzzz= colour


0001= anodised
9999= any RAL colour

info

 dimmable version DALI/TD
1-10V and emergency on
request



RECESSED LUMINAIRE

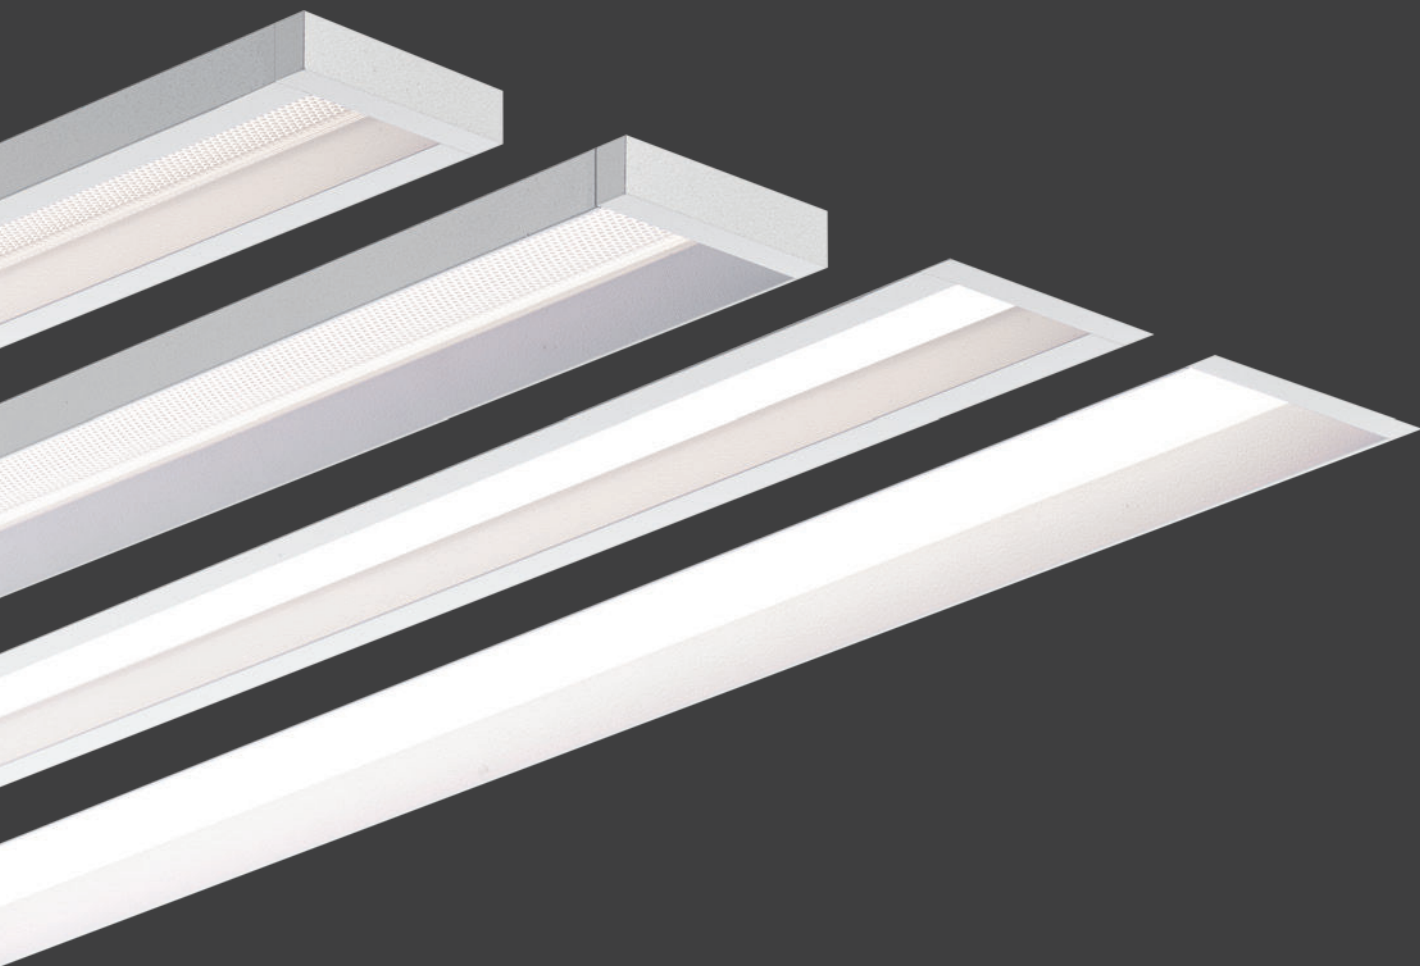


EDGE 55 WITH STRAIGHT TRIM

direct lighting



230V
50Hz IP20 A CE PS



satin



MPO



LOW lumen output

code	A	watt excl. driver	gross lumen	dim
07.740t054y-zzzz	1136	12,8	2680	-
07.740t055y-zzzz	1416	16,0	3350	-
07.740t056y-zzzz	1696	19,2	4020	-
07.740t057y-zzzz	1976	22,4	4690	-
07.740t058y-zzzz	2256	25,6	5360	-
07.740t059y-zzzz	2536	28,8	6030	-
07.740t050y-zzzz	2816	32,0	6700	-
07.740t454y-zzzz	1136	12,8	2680	dim
07.740t455y-zzzz	1416	16,0	3350	dim
07.740t456y-zzzz	1696	19,2	4020	dim
07.740t457y-zzzz	1976	22,4	4690	dim
07.740t458y-zzzz	2256	25,6	5360	dim
07.740t459y-zzzz	2536	28,8	6030	dim
07.740t450y-zzzz	2816	32,0	6700	dim

HIGH lumen output

code	A	watt excl. driver	gross lumen	dim
07.740t064y-zzzz	1136	28,8	5360	-
07.740t065y-zzzz	1416	36,0	6700	-
07.740t066y-zzzz	1696	43,2	8040	-
07.740t067y-zzzz	1976	50,4	9380	-
07.740t068y-zzzz	2256	57,6	10720	-
07.740t069y-zzzz	2536	64,8	12060	-
07.740t060y-zzzz	2816	72,0	13400	-
07.740t464y-zzzz	1136	28,8	5360	dim
07.740t465y-zzzz	1416	36,0	6700	dim
07.740t466y-zzzz	1696	43,2	8040	dim
07.740t467y-zzzz	1976	50,4	9380	dim
07.740t468y-zzzz	2256	57,6	10720	dim
07.740t469y-zzzz	2536	64,8	12060	dim
07.740t460y-zzzz	2816	72,0	13400	dim

t= diffusers

0= satin diffuser
1= microprismatic diffuser

y= colour temperature

3= 3000K
4= 4000K
2700K on request

zzzz= colour

0001= anodised
9999= any RAL colour

info

i dimmable version DALI/TD, 1-10V and emergency on request
finishing profile included for ceiling thickness of 12,5 mm,
ceiling thickness of 15 mm on request


EDGE 55 WITH STRAIGHT TRIM

direct lighting




230V 50Hz IP20 A CE PS



satin



MPO



LOW lumen output

code	A	watt excl. driver	gross lumen	dim
07.744t054y-zzzz	1136	12,8	2680	-
07.744t055y-zzzz	1416	16,0	3350	-
07.744t056y-zzzz	1696	19,2	4020	-
07.744t057y-zzzz	1976	22,4	4690	-
07.744t058y-zzzz	2256	25,6	5360	-
07.744t059y-zzzz	2536	28,8	6030	-
07.744t050y-zzzz	2816	32,0	6700	-
07.744t454y-zzzz	1136	12,8	2680	dim
07.744t455y-zzzz	1416	16,0	3350	dim
07.744t456y-zzzz	1696	19,2	4020	dim
07.744t457y-zzzz	1976	22,4	4690	dim
07.744t458y-zzzz	2256	25,6	5360	dim
07.744t459y-zzzz	2536	28,8	6030	dim
07.744t450y-zzzz	2816	32,0	6700	dim

HIGH lumen output

code	A	watt excl. driver	gross lumen	dim
07.744t064y-zzzz	1136	28,8	5360	-
07.744t065y-zzzz	1416	36,0	6700	-
07.744t066y-zzzz	1696	43,2	8040	-
07.744t067y-zzzz	1976	50,4	9380	-
07.744t068y-zzzz	2256	57,6	10720	-
07.744t069y-zzzz	2536	64,8	12060	-
07.744t060y-zzzz	2816	72,0	13400	-
07.744t464y-zzzz	1136	28,8	5360	dim
07.744t465y-zzzz	1416	36,0	6700	dim
07.744t466y-zzzz	1696	43,2	8040	dim
07.744t467y-zzzz	1976	50,4	9380	dim
07.744t468y-zzzz	2256	57,6	10720	dim
07.744t469y-zzzz	2536	64,8	12060	dim
07.744t460y-zzzz	2816	72,0	13400	dim

t= diffusers

0= satin diffuser
1= microprismatic diffuser

y= colour temperature

3= 3000K
4= 4000K
2700K on request

zzzz= colour

0001= anodised
9999= any RAL colour

info

i dimmable version DALI/TD, 1-10V and emergency on request
finishing profile included for ceiling thickness of 12,5 mm,
ceiling thickness of 15 mm on request


EDGE 55 WITH BEVELLED TRIM

direct lighting




230V
50Hz IP20 A CE PS



satin



MPO



LOW lumen output

code	A	watt excl. driver	gross lumen	dim
07.742t054y-zzzz	1136	12,8	2680	-
07.742t055y-zzzz	1416	16,0	3350	-
07.742t056y-zzzz	1696	19,2	4020	-
07.742t057y-zzzz	1976	22,4	4690	-
07.742t058y-zzzz	2256	25,6	5360	-
07.742t059y-zzzz	2536	28,8	6030	-
07.742t050y-zzzz	2816	32,0	6700	-
07.742t454y-zzzz	1136	12,8	2680	dim
07.742t455y-zzzz	1416	16,0	3350	dim
07.742t456y-zzzz	1696	19,2	4020	dim
07.742t457y-zzzz	1976	22,4	4690	dim
07.742t458y-zzzz	2256	25,6	5360	dim
07.742t459y-zzzz	2536	28,8	6030	dim
07.742t450y-zzzz	2816	32,0	6700	dim

HIGH lumen output

code	A	watt excl. driver	gross lumen	dim
07.742t064y-zzzz	1136	28,8	5360	-
07.742t065y-zzzz	1416	36,0	6700	-
07.742t066y-zzzz	1696	43,2	8040	-
07.742t067y-zzzz	1976	50,4	9380	-
07.742t068y-zzzz	2256	57,6	10720	-
07.742t069y-zzzz	2536	64,8	12060	-
07.742t060y-zzzz	2816	72,0	13400	-
07.742t464y-zzzz	1136	28,8	5360	dim
07.742t465y-zzzz	1416	36,0	6700	dim
07.742t466y-zzzz	1696	43,2	8040	dim
07.742t467y-zzzz	1976	50,4	9380	dim
07.742t468y-zzzz	2256	57,6	10720	dim
07.742t469y-zzzz	2536	64,8	12060	dim
07.742t460y-zzzz	2816	72,0	13400	dim

t= diffusers

0= satin diffuser
1= microprismatic diffuser

y= colour temperature

3= 3000K
4= 4000K
2700K on request

zzzz= colour

0001= anodised
9999= any RAL colour

info

i dimmable version DALI/TD, 1-10V and emergency on request
finishing profile included for ceiling thickness of 12,5 mm,
ceiling thickness of 15 mm on request



EDGE 55 WITH BEVELLED TRIM

direct lighting



230V 50Hz IP20 A CE PS



satin



MPO



LOW lumen output

code	A	watt excl. driver	gross lumen	dim
07.745t054y-zzzz	1136	12,8	2680	-
07.745t055y-zzzz	1416	16,0	3350	-
07.745t056y-zzzz	1696	19,2	4020	-
07.745t057y-zzzz	1976	22,4	4690	-
07.745t058y-zzzz	2256	25,6	5360	-
07.745t059y-zzzz	2536	28,8	6030	-
07.745t050y-zzzz	2816	32,0	6700	-
07.745t454y-zzzz	1136	12,8	2680	dim
07.745t455y-zzzz	1416	16,0	3350	dim
07.745t456y-zzzz	1696	19,2	4020	dim
07.745t457y-zzzz	1976	22,4	4690	dim
07.745t458y-zzzz	2256	25,6	5360	dim
07.745t459y-zzzz	2536	28,8	6030	dim
07.745t450y-zzzz	2816	32,0	6700	dim

HIGH lumen output

code	A	watt excl. driver	gross lumen	dim
07.745t064y-zzzz	1136	28,8	5360	-
07.745t065y-zzzz	1416	36,0	6700	-
07.745t066y-zzzz	1696	43,2	8040	-
07.745t067y-zzzz	1976	50,4	9380	-
07.745t068y-zzzz	2256	57,6	10720	-
07.745t069y-zzzz	2536	64,8	12060	-
07.745t060y-zzzz	2816	72,0	13400	-
07.745t464y-zzzz	1136	28,8	5360	dim
07.745t465y-zzzz	1416	36,0	6700	dim
07.745t466y-zzzz	1696	43,2	8040	dim
07.745t467y-zzzz	1976	50,4	9380	dim
07.745t468y-zzzz	2256	57,6	10720	dim
07.745t469y-zzzz	2536	64,8	12060	dim
07.745t460y-zzzz	2816	72,0	13400	dim

t= diffusers

0= satin diffuser
1= microprismatic diffuser

y= colour temperature

3= 3000K
4= 4000K
2700K on request

zzzz= colour

0001= anodised
9999= any RAL colour

info



dimmmable version DALI/TD, 1-10V and emergency on request
finishing profile included for ceiling thickness of 12,5 mm,
ceiling thickness of 15 mm on request





Multiline Licht nv
Europaweg 1, B-3560 Lummen
T. +32 (0) 11 450 260
F. +32 (0) 11 450 270
sales@multiline-licht.com
www.multiline-licht.com

Multiline Rahne Licht GmbH
Hirzenrott 2-4, D-52076 Aachen
T. +49 (0) 2408 959 440
F. +49 (0) 2408 959 335
info@multiline-rahnelicht.de
www.multiline-rahnelicht.de

Multiline Nederland nv
Gildenstraat 26, NL-4143 HS Leerdam
T. +31 (0) 345 622 001
F. +31 (0) 345 633 688
sales@multiline-licht.nl
www.multiline-licht.nl